
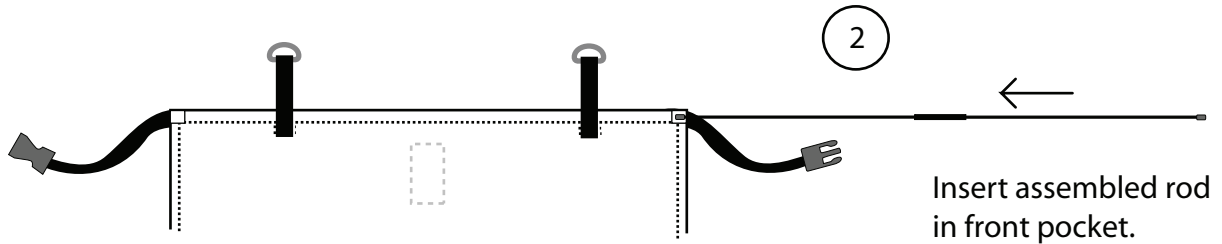



# Self-Support Hatch Umbrella Installation

Insert rod ends together.




Insert assembled rod in front pocket.

Bend the rod and insert clips to form a half-moon shape. Rod ends must be inside the half-moon.  
Drop the assembled umbrella on the hatch and adjust clip for best height.

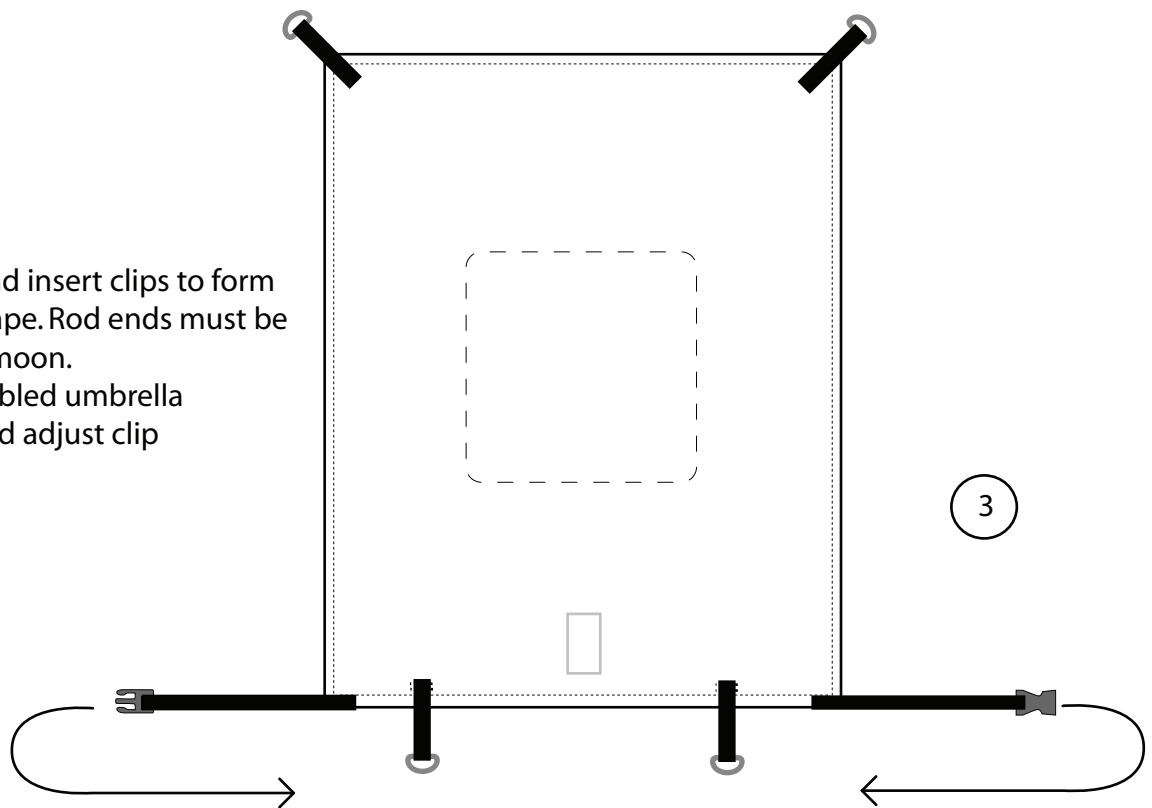

Fix small gauge ropes (not included) at corners and front D-rings. Fix ropes at siderails, stantions, lifelines or pulpit.

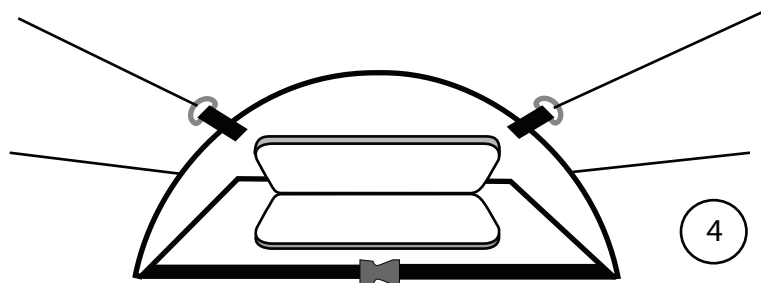

At time to store, let umbrella dry completely.  
Release clips, remove the rod by pulling both ends and fold.